

FINAL

Groundwater Investigation Report

Henderson Canyon Borrego Springs, San Diego County, CA TPM 21058, ER 07-05-001

Prepared by:



County of San Diego
Department of Planning and Land Use
5201 Ruffin Road, Suite B
San Diego, CA 92123

Project Applicant:

Mr. Kurt Levens
P.O. Box 2109
Borrego Springs, California 92004

NOVEMBER 5, 2008

TABLE OF CONTENTS

1.0	INTRODUCTION.....	1
1.1	<u>Purpose of Report</u>	1
1.2	<u>Project Location and Description</u>	1
2.0	EXISTING CONDITIONS.....	2
2.1	<u>Physical Setting</u>	
2.1.1	Topographic Setting.....	2
2.1.2	Climate.....	2
2.1.3	Land Use.....	2
2.2	<u>Hydrogeologic Setting</u>	3
2.2.1	Hydrogeologic Units.....	3
2.2.2	Water Quality.....	3
2.2.3	Groundwater Recharge.....	4
2.2.4	Groundwater Demand.....	4
2.2.5	Groundwater Levels.....	5
2.2.6	Groundwater Overdraft Conditions.....	6
3.0	SUMMARY AND CONCLUSIONS.....	8
4.0	REFERENCES.....	9
5.0	LIST OF PREPARERS AND LIMITATIONS.....	10

LIST OF FIGURES

Figure 1	Regional Location Map
Figure 2	Borrego Valley Aquifer
Figure 3	County Monitoring Wells

1.0 INTRODUCTION

1.1 Purpose of Report

The purpose of this report is to meet the groundwater investigation requirements of the San Diego County Groundwater Ordinance. This investigation provides a summary of groundwater resources within the Borrego Valley aquifer to determine if these resources are capable of meeting the project water demand.

Section 67.720 of the Ordinance specifies that for any proposed project listed in Section 67.711 within the Borrego Valley Exemption Area which either (1) includes a water-intensive use (greater than 20 acre-feet of groundwater per year), or (2) consists of a total project area of 100 acres or more, shall be accompanied by a Groundwater Investigation. Due to the proposed project's size being greater than 100 acres, a groundwater investigation is required for the project. The proposed project will not be approved unless the approving authority finds that based upon the Groundwater Investigation, groundwater resources are adequate to meet the groundwater demands of the project.

1.2 Project Location and Description

Project Location:

The proposed project is located on 114.9 gross acres on Borrego Springs Road within the unincorporated community of Borrego Springs, located in the northeastern corner of San Diego County as shown on Figure 1. The site overlies the Borrego Valley aquifer as shown on Figure 2. Borrego Valley lies within the Colorado Desert geomorphic province just to the east of the mountainous terrain of the Peninsular Ranges geomorphic province.

Project Description

The project is a Tentative Parcel Map and proposes to subdivide a 114.9 gross acre lot into four residential lots and one remainder parcel. The proposed project is proposed to be served by groundwater provided from the Borrego Water District. Individual septic systems will serve each parcel. At the time the project was scoped by the County of San Diego, it was determined that each residential parcel would use on average approximately 0.95 acre-feet of groundwater per year. This was based on the best information available at the time of scoping of residential water use rates in Borrego Valley provided by the Borrego Water District. Based on 0.95 acre-feet per lot, the project's five lots are estimated to use approximately 4.75 acre-feet of groundwater per year.

2.0 EXISTING CONDITIONS

2.1 Physical Setting

2.1.1 Topographic Setting

The project site is located at the base of the Henderson Canyon drainage on an alluvial fan. The lot varies in elevation from greater than 840 feet above mean sea level (ft MSL) on the western boundary to 740 ft MSL in the southeastern corner. Borrego Valley covers an area of approximately 110 square miles and ranges in elevation from approximately 1,100 to 1,200 ft MSL around the margins of the aquifer to approximately 450 ft MSL within the vicinity of Borrego Sink (see Figure 2). Approximately 400 square miles of tributary watershed from multiple intermittent creeks and streams drain from the mountains into Borrego Valley, which provide the primary source of groundwater recharge to the Borrego Valley aquifer. The largest surface water inflow occurs along the Coyote Creek drainage entering into the northern portion of Borrego Valley, and another important drainage is Borrego Palm Canyon, where surface water enters into the western portion of the valley. It is likely that there is intermittent surface water flows in the Henderson Canyon drainage which provide a source of direct groundwater recharge to the project site.

2.1.2 Climate

Borrego Valley has an arid climate with precipitation averaging approximately 3 to 6 inches in the center of the valley and 6 to 9 inches along the western margins of the valley. Precipitation in the mountainous regions located west of Borrego Valley average from 15 to over 21 inches annually. On average, over 75 percent of the annual precipitation occurs between November and May, and less than 25 percent of the annual precipitation occurs from summer rain and thunderstorms that typically occur from July through September. Temperatures are very hot during the summers with average high temperatures exceeding 105 degrees F, and winters are cool with average lows below 40 degrees F.

Monthly reference evapotranspiration (ET_o), which is a measure of potential evapotranspiration (PET) from a known surface such as grass or alfalfa, has been estimated for Borrego Valley to be approximately 71.6 inches per year (DWR, 1999). The ET_o rates are highest in July at 9.6 inches, and are lowest in December at 2.2 inches.

2.1.3 Land Use

The land uses in Borrego Valley primarily include residential, agricultural, recreational, and commercial uses. Most of the land is owned by private individuals or corporations. The majority of agricultural lands are located in the northern portion of Borrego Valley. The Anza Borrego Desert State Park and

other parkland cover some of the margins of Borrego Valley and the mountain regions above Borrego Valley. Borrego Springs is completely surrounded and encompassed by State park land which also includes Indian, private, and National forest land.

2.2 Hydrogeologic Setting (Existing Conditions)

2.2.1 Hydrogeologic Units

The United States Geological Survey (USGS) estimates that Borrego Valley is underlain with up to 2,400 feet of consolidated to unconsolidated sediments resting on basement granitic rocks. In 1982, the USGS estimated at steady-state groundwater conditions (in the year 1945), the Borrego Valley groundwater basin contained approximately 5.5 million acre-feet of water in storage. Further, the USGS identified three Hydrogeologic units: an upper, middle, and lower aquifer (Moyle and others, 1982; Mitten and others, 1988). In 1988, the USGS prepared a numerical model of the aquifer. The results of the model suggest that the specific yield of the upper, middle, and lower aquifers are 14%, 7%, and 3%, respectively.

Based upon subsequent study by Dr. David Huntley, the majority of readily available water in the Borrego Valley exists in the upper and middle aquifer. The amount of groundwater within these two aquifers was estimated to be approximately 2,131,000 acre-feet in 1945 and 1,900,500 acre-feet in 1979 (Huntley, 1993). The remaining water located within the lower aquifer is more difficult and costly to extract due to its low specific yield (estimated to be approximately 3%), its depth, and low specific capacity (estimated to be 5 gallons per minute/foot of drawdown or less). The Borrego Water District estimated that in 1999 the water remaining in the upper and middle aquifers was approximately 1,685,000 acre-feet (BWD, 2001).

2.2.2 Water Quality

In general, water quality has historically been good within Borrego Water District's wells with total dissolved solids at concentrations of less than 500 mg/L (BWD, 2001). Historical nitrate impacts have been noted as evidenced by wells taken out of production including Borrego Water District ID-4 wells 1 & 4, and the Roadrunner Mobile Home Park well.

High salinity, poor quality connate water is thought to occur in deeper formational materials of the aquifer as well as shallow groundwater in the vicinity of the Borrego Sink in the southern portion of the Borrego Valley. Since there have been no comprehensive studies of water quality within Borrego Valley, it is difficult to assess the amount of potable groundwater still available in Borrego Valley. Water quality impacts may occur as decreased water levels may induce flow of poor quality water found in deeper formational materials of the aquifer.

This may eventually necessitate additional expensive treatment of groundwater to make the water suitable as a drinking water supply.

Recent drilling of a dual screened monitoring well by DWR in the southern portion of Borrego Valley (northeast of Borrego Sink) provides confirmation of poor water quality in shallow groundwater and deteriorating with depth (DWR, 2007). Water analyzed from the upper completion (45 to 155 feet below ground surface) indicated total dissolved solids (TDS) of 1,300 mg/L. Water analyzed from the lower completion (200 to 345 feet below ground surface) indicated TDS of 2,300 mg/L. The high TDS content in both screened intervals of this well (as well as high sulfate content) make the water unsuitable for a drinking water supply without treatment.

2.2.3 Groundwater Recharge

Estimated Recharge

Estimated annual recharge to the Borrego Valley aquifer was initially estimated by the USGS to be approximately 4,800 acre-feet per year (Mitten and others, 1988). The source of recharge was estimated to come primarily from three major drainages: Coyote Creek (approximately 65%), Borrego Palm Canyon and San Felipe Creek (approximately 35% combined). Little recharge, if any from San Felipe Creek benefits users in Borrego Springs as the majority exits Borrego Valley and flows toward Ocotillo Wells.

In a thesis by Netto in 2001, it was estimated that from 1945 to 2000, recharge from groundwater underflow, stream recharge, and bedrock recharge is approximately on average 5,670 acre-feet per year. In a thesis by Henderson in 2001, it was estimated that recharge from 1945 to 2000 averaged approximately 6,170 acre-feet per year. Both estimates showed that recharge had a very large range due to the extremes in rainfall, from very little during dry years to recharge above 50,000 acre-feet in the wettest year.

Age of Groundwater from Borrego Water District Wells

The Borrego Water District in 2001 obtained the age of the water being pumped in two of their pumping wells, well ID 4-11 and well ID 4-18, as shown on Figure 3. Analytical results from water sampled from well ID 4-11 indicated the water to be 873 years old (+- 42 years), and results from water sampled from well ID 4-18 indicated the water to be 1,982 years old (+- 54 years). The results indicate that water in these wells was not from recent groundwater recharge, but rather from water that percolated and was recharged many hundreds of years ago.

2.2.4 Groundwater Demand

The Borrego Water District has estimated the amount of water used within Borrego Valley from 1950 to 1999. The most recent dataset from 1999 was

estimated using records of metered water use for municipal purposes, inspection of irrigated acreage of agricultural land, and reports from golf course operators.

<u>Year</u>	<u>Municipal</u>	<u>Agricultural</u>	<u>Golf Course and Landscape</u>	<u>Total</u>
1950	170	11,435	190	11,795
1958	225	22,455	790	23,470
1962	265	13,455	1,725	15,820
1968	475	7,260	1,720	9,455
1972	530	5,320	2,270	8,120
1978	600	5,705	2,050	8,355
1980	430	10,600	2,100	13,130
1999	2,272	15,590	4,435	22,297

2.2.5 Groundwater Levels

Groundwater levels in Borrego Valley were originally monitored by the USGS as far back as the 1940s. The County of San Diego has been collecting groundwater level data since the early 1980s. Water levels in Borrego Valley have been declining since 1945, indicating a long-term overdraft condition.

Between 1945 and 1980, water levels declined by as much as 100 feet, due to more water being extracted than was being replenished (USGS, 1982).

To provide an understanding of water level trends since the 1980s, water levels from eight wells (see Figure 4 for locations) monitored by the County are summarized in the table below.

Well	Period of Monitoring	Cumulative Drawdown (feet)	Average Change in Water Levels (feet per year)		
			1980s	1990 to 1997	Since 1998
Borrego1	1983-2002	30.6	-1.1	-1.7	-2.3
Empty Irrigation	1987-2006	47.2	-1.5	-2.3	-3.2
Fortiner	1983-2006	55.6	-0.6	-3.4	-3.1
Levie	1986-2005	38.9	-1.0	-2.2	-2.4
State Park 2	1987-2006	49.8	-2.4	-2.2	-3.3
UEC North	1985-2006	26.7	-1.2	-0.5	-2.1
UEC South	1984-2006	24.0	-1.3	-0.5	-2.1
Victor	1983-2001	15.3	-0.9	-0.7	-1.1

AVERAGE OF ALL WELLS	-1.2	-1.7	-2.4
----------------------	------	------	------

Since the 1980s, water level declines in the 8 wells have ranged from 15.3 feet (Victor well) to 55.6 feet (Fortiner well). From 1998 to 2006, water level declines have averaged 2.4 feet per year, which is roughly twice the rate of decline measured in the 1980s. This is likely due to the increased extraction rates that are occurring compared to extraction in the 1980s.

It has been estimated that the volume of groundwater in storage decreases with depth in Borrego Valley. Therefore, it is estimated that basin-wide rates of water level decline will increase with ongoing groundwater mining, even without any change in the deficit between groundwater extraction and recharge.

2.2.6 Groundwater Overdraft Conditions

Since 1945, water levels in Borrego Valley have continually declined in some cases by as much as over 150 feet. Groundwater has and is continuing to be extracted at rates that exceed recharge, which has caused an apparent long-term overdraft condition, also known as groundwater mining. In the past 20 years, rates of decline have increased sharply likely in response to new development and additional groundwater extraction. Dr. Tim Ross of the California Department of Water Resources has estimated the overall rate of overdraft in the aquifer through time as follows:

1980-1989: -4,200 acre-feet per year

1989-2000: -9,100 acre-feet per year

1998-2005: -14,300 acre-feet year

It was estimated that a total of 550,000 acre-feet of water was permanently removed from the aquifer from 1945 to 2005 (Ross, 2006).

The Borrego Water District estimated that in 1999 the water remaining in the upper and middle aquifers was approximately 1,685,000 acre-feet (Borrego Water District, 2001). Based upon this estimation of groundwater storage in 1999, if the overdraft condition continues at the estimated rate of 14,300 acre-feet of water per year, the upper and middle aquifers may be 50% depleted in approximately 50 years, and may be completely depleted in approximately 100 years. However, groundwater overdraft conditions have more than tripled since the 1980s, and continued development without groundwater mitigation measures in Borrego Valley will exacerbate the current overdraft condition. Therefore, without mitigation, the overdraft condition is likely to continually worsen, and the aquifer may be depleted at rates far faster than existing overdraft conditions estimated by Dr. Ross. Maximum buildout of the current General Plan would allow for a total of approximately 16,000 residential lots to be built. As a worst case and rather unrealistic scenario, assuming all 16,000 lots were built out now

without mitigation, the upper and middle aquifer may be 50% depleted in less than 30 years and may be completely depleted in less than 60 years.

It should be understood that groundwater impacts from the overdraft condition are already occurring and will continue to worsen as mining of groundwater continues. Current impacts include dry wells, decreased well efficiency and increased pumping costs as water levels continue to decline. This will continue and more wells will need to be replaced as water levels drop below perforated levels. Also, water quality impacts may occur as decreased water levels may induce flow of high salinity, poor quality connate water found in deeper formational materials of the aquifer. This may eventually necessitate additional expensive treatment of groundwater to make the water suitable as a drinking water supply.

3.0 SUMMARY AND CONCLUSIONS

As documented within this report, the Borrego Valley aquifer has a well documented groundwater overdraft condition, where year after year groundwater extraction exceeds the amount of groundwater that is recharged back into the aquifer. In the long-term, this situation is not sustainable. The most recent estimate indicates that 14,300 acre-feet of water are being permanently removed from the aquifer per year and that the overdraft condition is worsening with time as groundwater extraction in Borrego Valley increases. It is also estimated that as water levels continue to drop, the rate of decline will increase since groundwater in storage is estimated to decrease with depth. It was estimated that in 1999, the upper and middle aquifer still contained approximately 1,685,000 acre-feet of groundwater in storage. Based upon the current estimated amount of groundwater in storage and existing estimated amount of overdraft as documented in this report, the upper and middle aquifer may be fully depleted in a little over 100 years. However, since the 1980s the groundwater overdraft condition has more than tripled, and future groundwater use at this pace without groundwater mitigation will likely cause the overdraft condition to worsen and the aquifer to be depleted in far less time.


4.0 REFERENCES

- Borrego Water District, 2001. Groundwater Management Study, Report of the Technical Committee.
- California Department of Water Resources (DWR), Water Use Efficiency Office, 1999. California Irrigation Management Information System (CIMIS) Reference Evapotranspiration Map.
- DWR, Southern District Office, 2007. An Interpretation of Geologic Materials Encountered in the Boring of Borrego Water District Monitoring Well MW-5, Technical Information Record SD-07-02, April 2007.
- Henderson, T.W., 2001. Hydrogeology and Numerical Modeling of the Borrego Valley Aquifer System. Masters Thesis, San Diego State University, Fall 2001.
- Huntley, David, 1993. Letter to DPLU Regarding Groundwater Situation in Borrego Valley, San Diego State University, January 26, 1993.
- Mitten, H.t., G.C. Lines, C. Berenbrock, and T.J. Durbvin, 1988. Water Resources of Borrego Valley and Vicinity, San Diego County, California: Phase 2--Development of a Groundwater-Water Model. U.S. Geological Survey Water-Resources Investigations Report 87-4199.
- Moyle, W.R., Jr., 1968. Water wells and springs in the Borrego, Carrizo, and San Felipe Valley areas, San Diego and Imperial Counties, California.
- Moyle, W.R., Jr., 1982. Water Resources of Borrego Valley and Vicinity, Phase 1-- Definition of Geologic and Hydrologic Characteristics of Basin, U.S. Geological Survey Open-File Report 82-855.
- Netto, S.P., 2001. Water Resources of Borrego Valley San Diego County, California. Masters Thesis, San Diego State University, Fall 2001.
- Ross, Timothy, 2006. Characterizing Water Resources of Borrego Valley Groundwater Basin Presentation, California Department of Water Resources, September 2006.
- San Diego County. Groundwater Monitoring Program Data. Department of Planning and Land Use. Data from 1980 through 2006.
- San Diego County Groundwater Ordinance.
- San Diego County Water Authority, 2004. Regional Water Facilities Master Plan. January 2004.

5.0 LIST OF PREPARERS AND LIMITATIONS

This report provides a summary of current groundwater conditions in Borrego Valley to meet the requirements for a Groundwater Investigation as required by the San Diego County Groundwater Ordinance.

The report was prepared based on best available information from groundwater investigations conducted by the USGS, DWR, and others. Future hydrogeological investigations conducted in Borrego Valley may result in revisions to previous estimates made of the estimated groundwater remaining in storage and the overall rate of overdraft occurring. At the current rate of overdraft estimated by DWR and especially if overdraft conditions continue to increase as it has within the past 25 years, the decline in water levels will continue to result in increasing costs to pump water and dry wells. It is possible that impacts including, but not limited to, dry wells and potential water quality degradation from high salinity water within deeper formational deposits may occur in Borrego Valley within the next 20 to 30 years.







Jim Bennett, PG #7707, CHG # 854
County Groundwater Geologist




Figure 1
Henderson Canyon
Regional Location Map


Legend

-  Henderson Canyon APN 140-110-03
-  Community/Subregional Planning Areas
-  Subareas



THIS MAP IS PROVIDED WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE PRODUCT MAY CONTAIN INFORMATION FROM SANDAG Regional Information System which is the property of SANDAG. All Rights Reserved. This product may contain information provided by Thomas Brothers Maps.




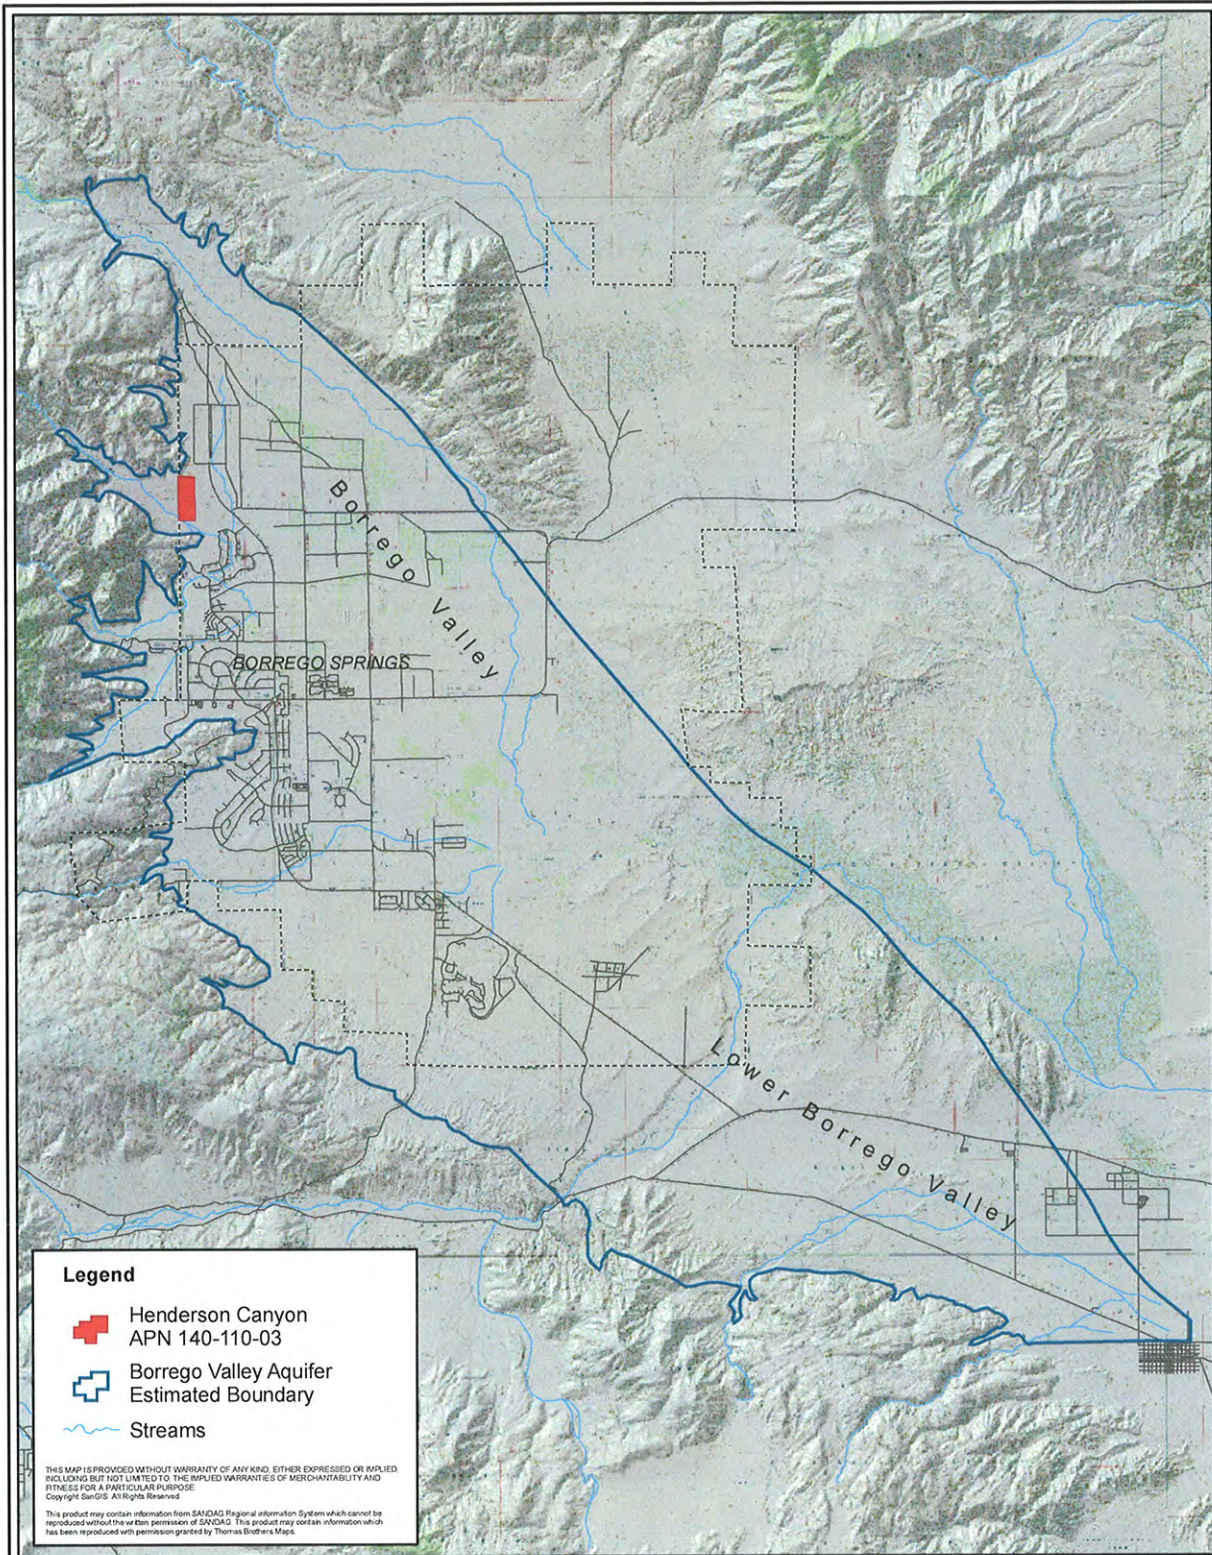

0 1.5 3 Miles



Figure 2
Henderson Canyon
Borrego Valley Aquifer

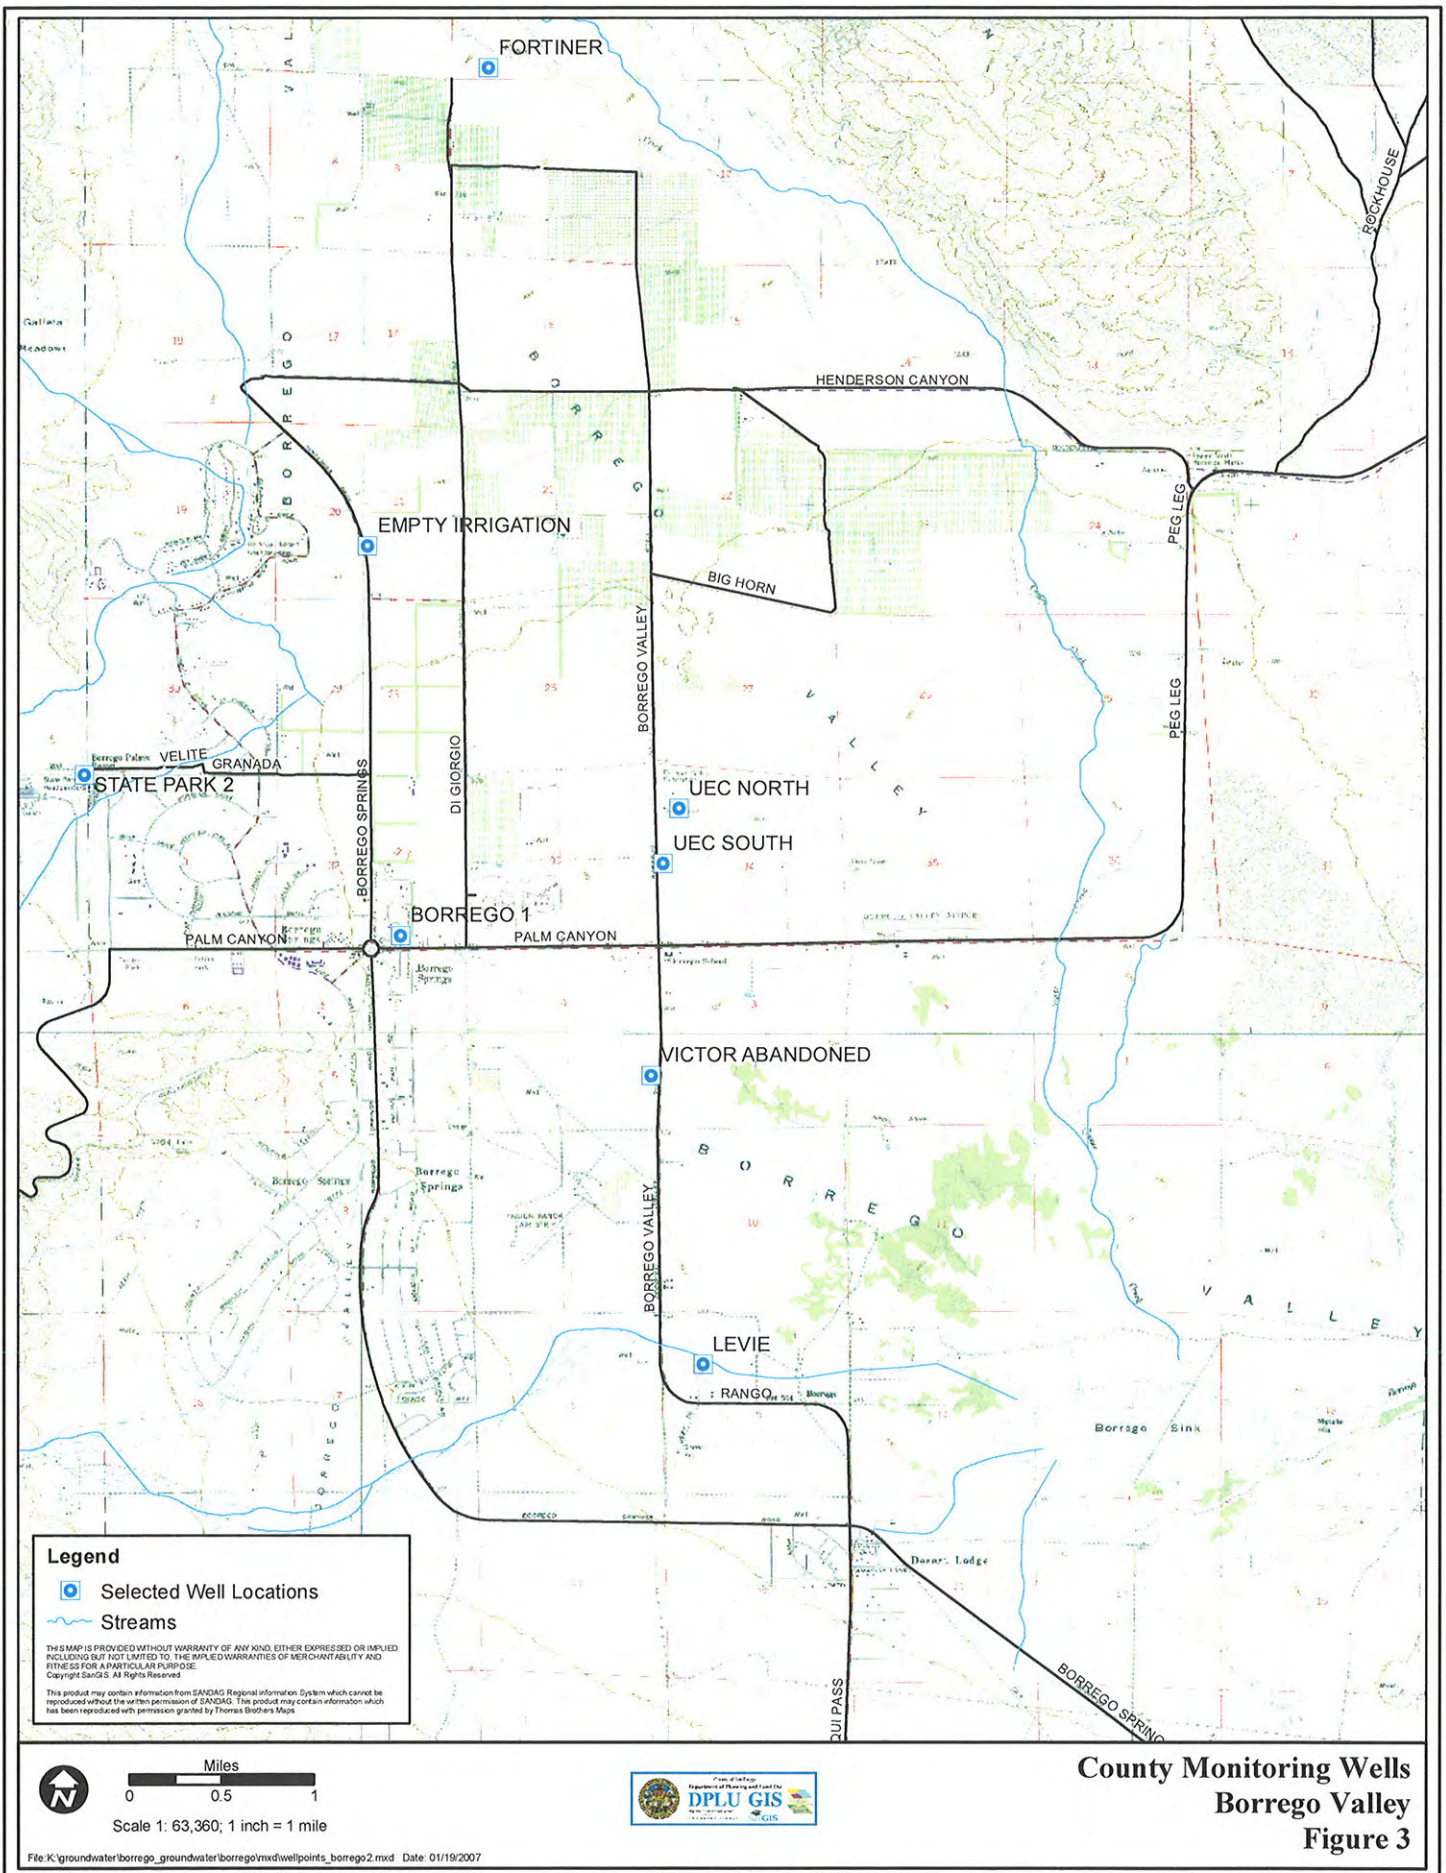

Legend

- Selected Well Locations
- Streams

THIS MAP IS PROVIDED WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED INCLUDING BUT NOT LIMITED TO THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. Copyright SanGIS. All Rights Reserved.

This product may contain information from SANDAG Regional Information System which cannot be reproduced without the written permission of SANDAG. This product may contain information which has been reproduced with permission granted by Thomas Brothers Maps.

Miles

0 0.5 1

Scale 1: 63,360; 1 inch = 1 mile



**County Monitoring Wells
Borrego Valley
Figure 3**